

MSA ModCon™ 75 Controller



- ➔ Self-configuring to Ultima® X Gas Monitors with X³ Technology
- ➔ ModBUS RTU input
- ➔ ModBUS-over-Ethernet interface
- ➔ View and control of up to 25 Ultima X Gas Monitors with X³ Technology (75 total sensors)
- ➔ All pertinent data displays on main data screen
- ➔ 24 VDC power supply
- ➔ Seven-year battery backup provides memory and real-time clock
- ➔ Logs up to 2000 events
- ➔ Nine zone control relays
- ➔ Password-protected
- ➔ cUL listed (panel only)

The perfect partner for your Ultima X Series Gas Monitors with X³ Technology.

MSA's ModCon75 Controller is designed for use with your Ultima X Gas Monitor with X³ Technology, enabling self-configuration, saving time and money. This new, economical choice is suitable for all industrial, municipal, oil, gas, petrochemical, and HVAC applications.



Pre-programmed, self-configuring controller for monitoring up to 25 Ultima[®] X Gas Monitors with X³ Technology (75 sensors total). Compact unit allows for remote control of many features. ModBUS RTU input and ModBUS-over-Ethernet interface capability.

Specifications: ModCon75 Controller	
PHYSICAL CHARACTERISTICS	
Panel Mount	Weight: 3 lbs.
	Dimensions: 6.1"H x 10.24"W x 2.8"D
	Enclosure type: none
	Maximum number of sensors: 75
	Front panel is IP65/NEMA 4X (when mounted)
	Mounting provisions: installation designed for panel mount
Wall Mount	Weight: 18 lbs
	Dimensions: 17.3"H x 15.3"W x 6.7"D
	Enclosure type: NEMA 4X fiberglass enclosure with panel mount display and controls
	Maximum number of sensors: 75
	Mounting provisions: 4 mounting holes located on top and bottom (2 each) for flat surface attachment
GRAPHICAL DISPLAY SCREEN	
Type	Negative blue STN LCD graphical display
Illumination Backlight	CCFL (fluorescent lamp)
Display Resolution	240 x 64 pixels
HMI Displays	Up to 255
BATTERY BACKUP	
Battery Backup	7-year typical battery backup for all memory sections and real-time clock
ENVIRONMENTAL	
Temperature	Operating temperature range: 0° to 50°C (32° to 122°F)
Humidity	Operating humidity range: 5-95% RH, non-condensing

Note: This bulletin contains only a general description of the products shown. While uses and performance capabilities are described, under no circumstances shall the products be used by untrained or unqualified individuals and not until the product instructions including any warnings or cautions provided have been thoroughly read and understood. Only they contain the complete and detailed information concerning proper use and care of these products.



ID 07-2129-MC / October 2011

© MSA 2011 Printed in U.S.A.

Corporate Center
1000 Cranberry Woods Drive,
Cranberry Township, PA 16066 USA
Phone 724-776-8600
www.MSAnet.com

U.S. Customer Service Center
Phone 1-800-MSA-INST
Fax 1-800-967-0398

MSA Canada
Phone 1-800-672-2222
Fax 1-800-967-0398

MSA Mexico
Phone 01 800 672 7222
Fax 52-44 2227 3943

MSA International
Phone 724-776-8626
Toll Free: 1-800-672-7777
FAX 724-741-1559

Offices and representatives worldwide

For further information:




Typical Display



- Scrolling display features sensor gas type, gas reading, and engineering units.
- Unit continuously scrolls through sensor screens.
- OPC-compliant for graphics, displays, and datalogging.

Main Menu

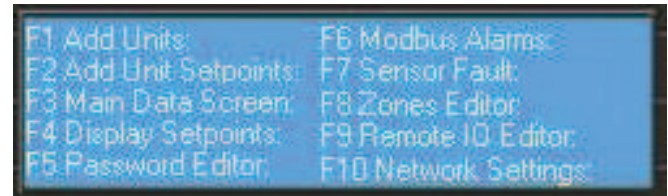

- Navigate through the menu options using plain language text for improved ease of use.
- Offers easy access to add nodes, view and edit alarm set-points, set zone relays, and set password.

Alarm Set-Points



- Factory set-points are downloaded automatically from the Ultima X Gas Monitor with X³ Technology during setup.
- Alarm set-points are easily modified by user at the ModCon75 or gas monitor.
- Sensor alarm options include on/off, latching/non-latching and increasing/decreasing.
- Password-protected.

Options:

- Choice of panel- or wall-mounted versions

PART #	DESCRIPTION
10081284	Panel Mount
10081283	Wall Mount